

INSTRUCTIONS




Product name	CLICK'N ROLL
Product type	Dog seatbelt restraint system
Item No.	15340100
Attachment	To buckle of vehicle seatbelt
Use	Securing dogs in vehicles
Transport position	Rear seat
Version and features	Black, approximately 100 cm in length
Safety notice	Always use a pet harness and not just the collar

kleinmetall GmbH
Hainstrasse 52
D-63526 Erlensee
Germany
Phone +49 6183-91120-0
Fax +49 6183-72152
info@kleinmetall.de
www.kleinmetall.de




! Please read these instructions carefully and retain them for future reference.
! Ensure your dog is properly secured before operating your vehicle.

PARTS: 1. Belt retractor with quick snap 2. Belt clip A 3. Belt clip B

Check your seat-belt buckle before mounting!

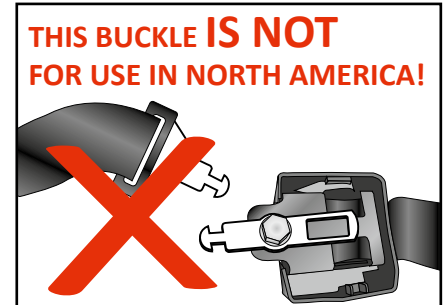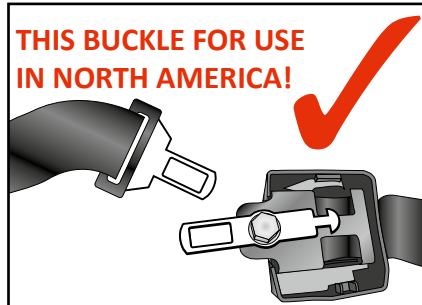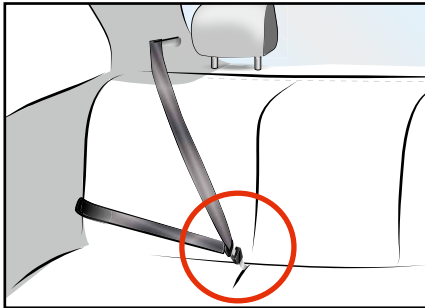

IMPORTANT NOTICE: Always attach one of the enclosed belt clips.

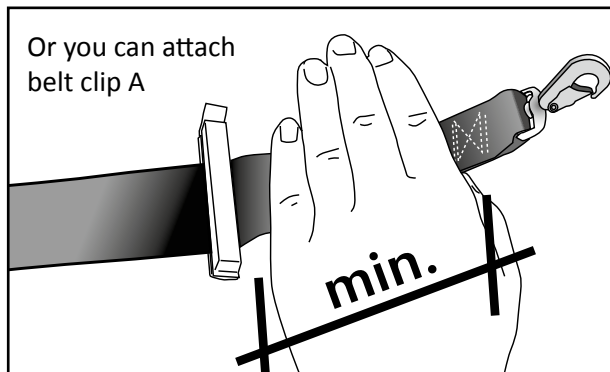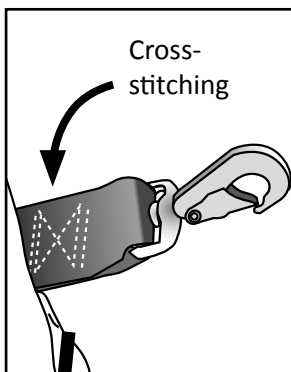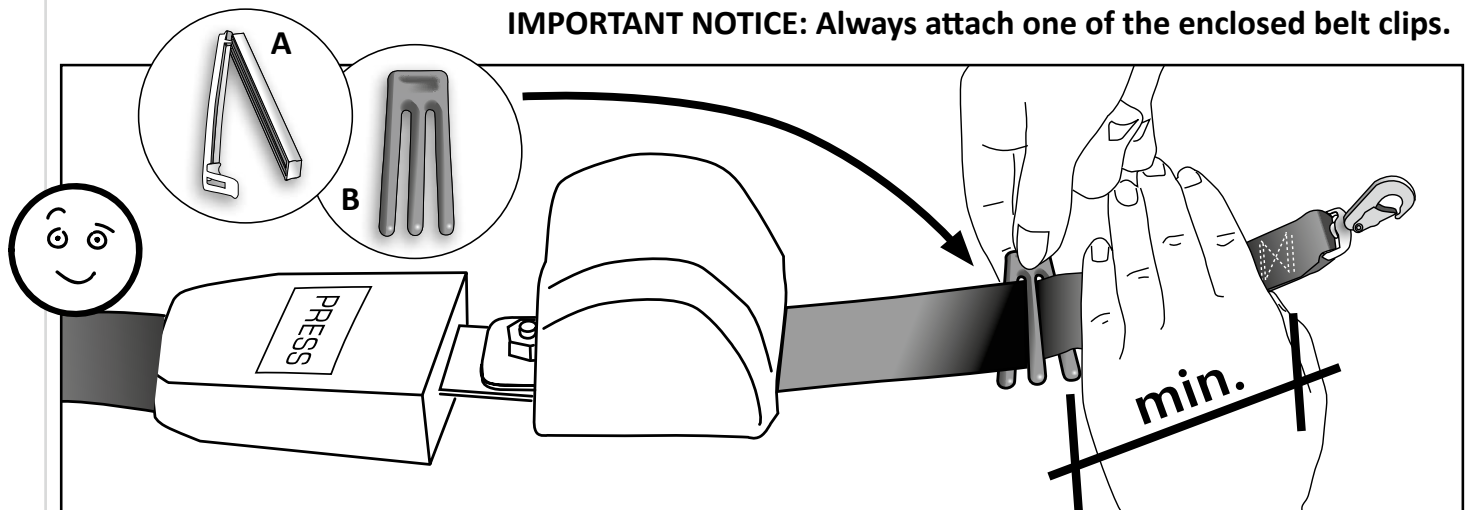

- One of the belt clips must be attached to the restraining belt at a **MINIMUM DISTANCE** of approximately one hand-width from the **cross-stitched webbing** below the quick snap.
- The belt clip **must remain attached** to the seatbelt.
- Failure to properly install the belt clip will invalidate any warranty.



An ISO 9001 certified company

Ausgabe : dö.09/2015


INSTRUCTIONS

Product name	CLICK'N ROLL
Product type	Dog seatbelt restraint system
Item No.	15340100
Attachment	To buckle of vehicle seatbelt
Use	Securing dogs in vehicles
Transport position	Rear seat
Version and features	Black, approximately 100 cm in length
Safety notice	Always use a pet harness and not just the collar


kleinmetall GmbH
Hainstrasse 52
D-63526 Erlensee
Germany
Phone +49 6183-91120-0
Fax +49 6183-72152
info@kleinmetall.de
www.kleinmetall.de

! Please read these instructions carefully and retain them for future reference.
! Ensure your dog is properly secured before operating your vehicle.


Improper installation – jammed belt

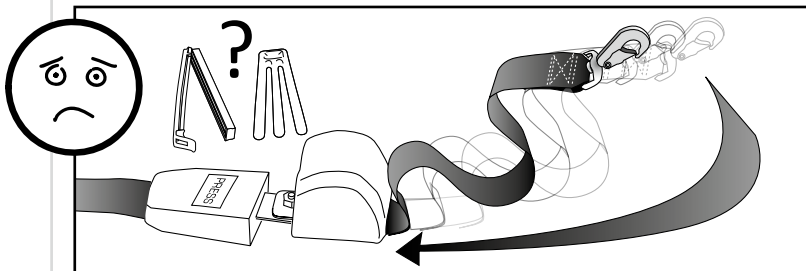

- The belt clip prevents the restraining belt from getting pulled completely inside the retractor.
- Failure to attach the belt clip can result in the belt being rolled up into the retractor beyond the cross-stitching, which will cause it to jam.
- A jammed belt mechanism is not a valid reason for a return, refund or replacement.
- Should the belt get jammed, try to dislodge it by gently moving the belt back and forth.
- Do not use force or jerk the belt.

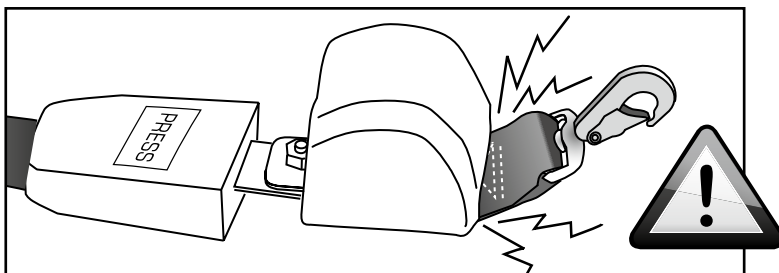

The right way!

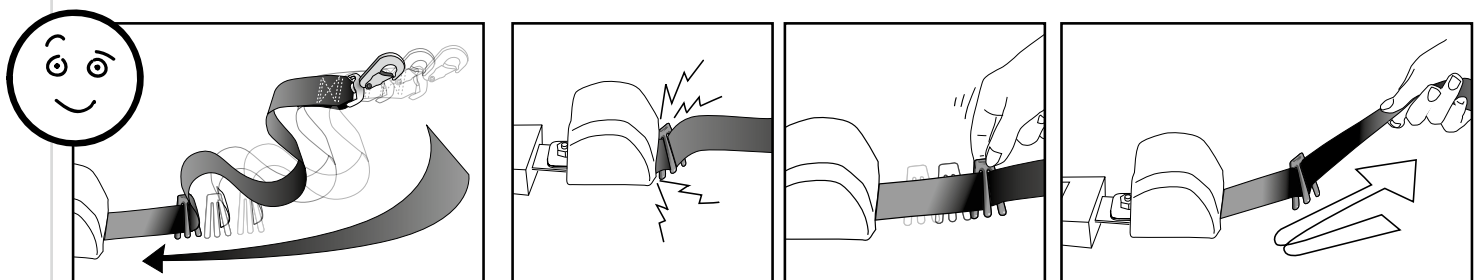

Safety notice:

Always transport your dog on the back seat of the vehicle – preferably behind the (unoccupied) front passenger seat. Always use a pet harness and not just the collar.

Care and cleaning:

Remove any accumulated dirt and hair, and use a neutral soapy water solution to occasionally clean the fasteners.

Important notice:

Regularly inspect your CLICK'N ROLL and replace it if any wear, tears or damage are discovered.



An ISO 9001 certified company

Edition: 01/2013